

Bitta Camel

AISI 316 Fissaggio con prigionieri, in acciaio inox AISI 316 lucidate a specchio.

Codice	Lunghezza mm	Interasse mm	Ø prigionieri mm	Carico di rottura kg	Base inox OPTIONAL
40.133.15	150	45,4	6	1866	40.133.50
40.133.20	200	59,6	8	2682	40.133.51
40.133.25	250	76,3	10	5741	40.133.52
40.133.30	300	91,8	12	7613	40.133.53

OSCOLATI



Basetta per bitte Camel di rinforzo/finitura

AISI 316

Codice	mm	Per bitte
40.133.50	25x65	40.133.15
40.133.51	35x90	40.133.20
40.133.52	50x110	40.133.25
40.133.53	60x140	40.133.30

OSCOLATI




Bitta Silhouette

AISI 316 REGISTERED DESIGN / DISEGNO DEPOSITATO

In acciaio inox AISI 316 lucidato a specchio.

Codice	A mm	B mm	C mm	D mm	E mm	Ø prigionieri mm
40.150.15	150	30,5	63,5	45	24,5	8
40.150.20	200	40	85	60	32,5	10
40.150.25	250	50	106,5	75	40,5	12
40.150.32	320	64	136	96	52	14
40.150.38	380	76	161,5	114	61,5	16


OSCOLATI

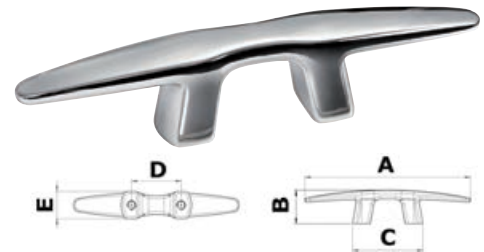

Bitta Silhouette con fori

AISI 316 In acciaio inox AISI 316 lucidato a specchio.

Codice	A mm	B mm	C mm	D mm	E mm	Vite passante Ø mm
40.153.15	150	30,5	63,5	45	24,5	8
40.153.20	200	40	85	60	32,5	10
40.153.25	250	50	106,5	75	40,5	12
40.153.32	320	64	136	96	52	14
40.153.38	380	76	161,5	114	61,5	16

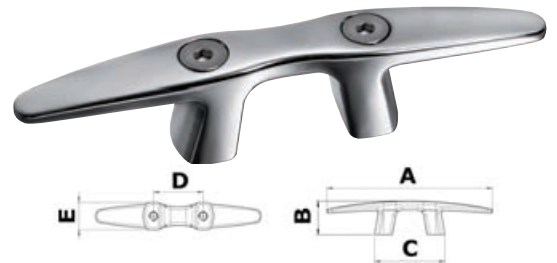


Bitta Bull Dog

AISI 316 In acciaio inox AISI 316 lucidata a specchio, fissaggio tramite prigionieri.

Codice	A mm	B mm	C mm	D mm	E mm	Ø prigionieri mm	Carico di rottura kg	Prigionieri consigliati	Basetta in plastica bianca OPTIONAL
40.131.16	158	35	74	53	49	8	4497	40.142.09	40.131.40
40.131.20	205	44	94	64	62	10	6106	40.142.11	40.131.41
40.131.25	255	54	118	80	76	10	7051	40.142.11	40.131.42
40.131.30	305	65	127	90	82	14		40.142.14	-

OSCOLATI



Bitta Bull Dog - Black Line

AISI 316 Realizzata in acciaio inox lucido con l'aggiunta di un trattamento superficiale integrato di colore nero che rende la superficie durissima e molto resistente alla corrosione.

Codice	A mm	B mm	C mm	D mm	E mm	Ø prigionieri mm	Prigionieri consigliati
40.131.56	158	35	74	53	49	8	40.142.09
40.131.57	205	44	94	64	62	10	40.142.11

